



Fixed Attenuators (Doped Fiber)

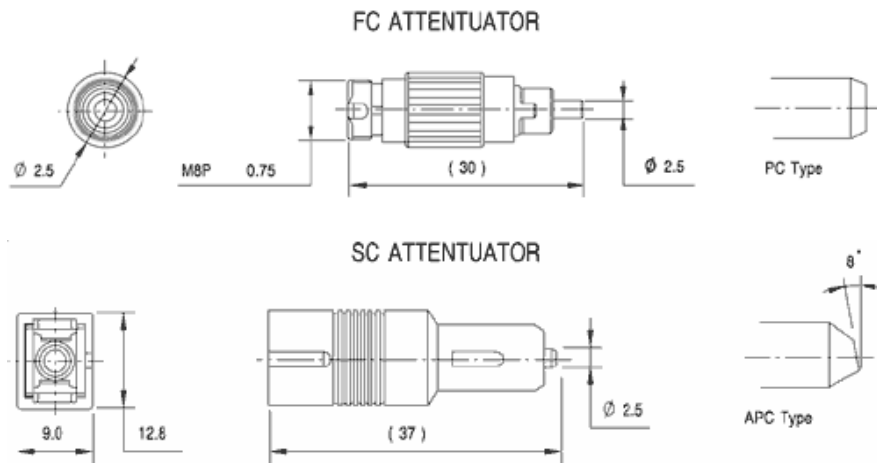

- FC, SC, ST, LC Attenuators, Doped Fiber suitable for Dual Wave Length
- High return loss
- Low insertion loss variation
- Low PDL
- Long term reliability
- Compliant with Bellcore GR910
- Other values available upon request

Specifications :

FC, SC, ST, LC Fixed Attenuator (Doped Fiber)			
Attenuation Value	PC	5, 10, 15, 20	dB
	UPC	5, 10, 15, 20	dB
	APC	5, 10, 15, 20	dB
Operating Wavelength		1240 – 1600 nm	
Return Loss (except MM)	PC	>45 dB	
	UPC	>55 dB	
	APC	>65 dB	
Attenuation Accuracy	Grade		
	0.5 – 5.0	±0.5 dB	
	6.0 – 10.0	±0.7 dB	
	12.5 – 20.0	±1.0 dB	
	22.5 – 25.0	±1.3 dB	
Maximum Optical Input Power 30 min. passed		250 mW	
Polarization Dependent Loss (PDL)		≤0.2 dB	
Operating Temperature Range		-40°C ~ +80°C	
Storage Temperature Range		-40°C ~ +85°C	
Humidity Non-packing		75°C, 95% RH	

บริษัทฯ ขอสงวนสิทธิ์ในการเปลี่ยนแปลงใด ๆ โดยไม่แจ้งให้ทราบล่วงหน้า รวมทั้งข้อผิดพลาดอันเนื่องมาจากการพิมพ์

