

1HU Patch Panel Rear Connection

24 ports, PCB version

Application

The Nexans Essential 1HU twisted pair patch panel is based on 19" frame dimensions.

It is easy to manage thanks to the cable guide tie wrap support.

The use of patch guides (sold separately) allows an orderly arrangement of patchcords.

Performance


The Nexans Essential Range of Cat 5e cabling products are compliant with ISO/IEC 11801 Ed 1.2 2000.

Guarantees

- 5 years product warranty.
- 15 years Link Certificate available when installed as part of a Nexans Essential system.

Installation

- Advantage : 110 and/or LSA+ termination.
- Supply with a termination tool and cable strippers.
- Supplied with fixings.
- UL listed.
- Short PCB module : for easy installation where depth is restricted.
- Easy rear connection when used in racks.
- Colour code T568A & T568B.

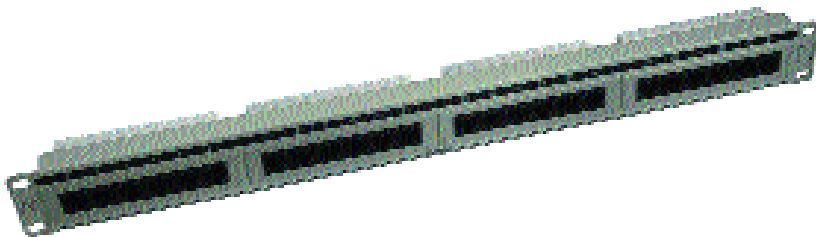

1 HU patch panel with 24 ports rear connection

1HU Patch Panel Rear Connection

24 ports, PCB version

Edition 12.09.2002
Copyright © Nexans 2002

All data subject to change
without prior notice.

For installation, please refer to
the installation guidelines.

Physical Characteristics

Dimensions		19" 1 HU, depth 34mm
Connections	type	LSA+/110 IDC connectivity
	number	24 ports
Facilities	strain relief	tie wrap and grounding

Paris

rue Mozart, 4-10
92587 Clichy CEDEX
France
Tel +33 (0)1 56 69 84 00
Fax +33 (0)1 56 69 86 38

Ordering Codes

1 HU patch panel, 24 ports - rear connection	
	with clip-on
unscreened	500.202

Brussels

Alsebergsesteenweg 2, b3
1501 Buizingen
Belgium
Tel +32 (0)2 363 38 00
Fax +32 (0)2 365 09 99

2 HU Universal Patch Guide	102.127
1 HU Patch Guide with rings	102.105

Orpington

Swan House
New Mill Road
Crayfields Business Park
Orpington - Kent
BR5 3QD
United Kingdom
Tel +44 (0) 1689 887654
Fax +44 (0) 1689 887650

Accessories	
LSA+ termination tool	102.107

www.nexans.com/ncs